

## Control System


### DC168 Time Transmitter Specification

#### Technical Support

- Input voltage: 3V (CR2430)
- Transmitting frequency: 433.92MHz
- Transmitting power: 10 milliwatt
- Operating temperature: -10°C ~ +50°C
- Transmission distance: 200 meters open Office 35 meters on two walls

**Notes:** The time difference between setting up first time and down limit cannot be less than 32 minutes. Otherwise the Error will show on the LCD screen of transmitter under Automatic mode and Random mode. Simultaneously, Time set is invalid, and set status is exited.

#### Technical Support

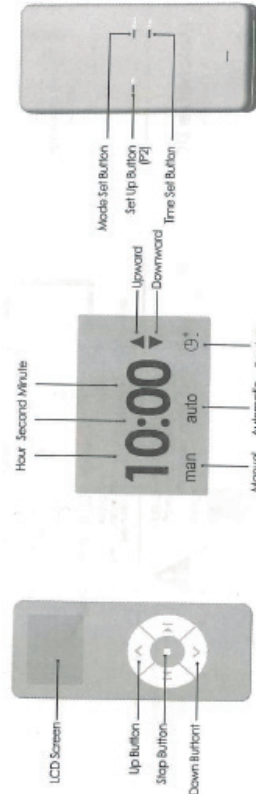


DC168

DC168 LCD Screen


DC168 Back Side

#### Mode Switch

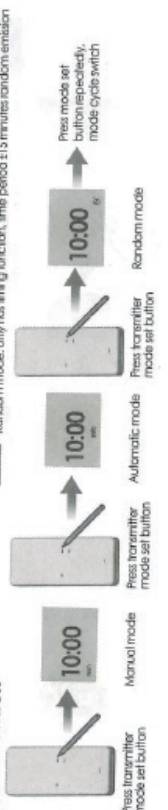


**Additional Function:** Manual mode: normal transmitter, without firing function. Automatic mode: normal transmitter with firing function. Random mode: only has firing function, time period ± 5 minutes random emission.


#### Additional Function

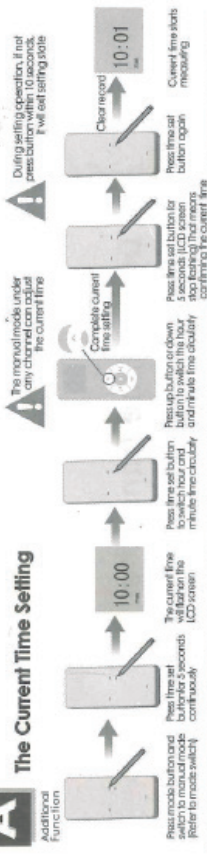


#### Additional Function

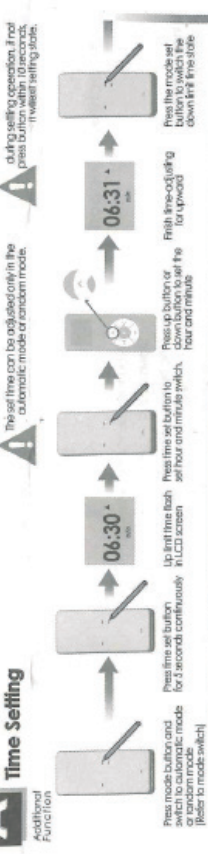


#### Additional Function

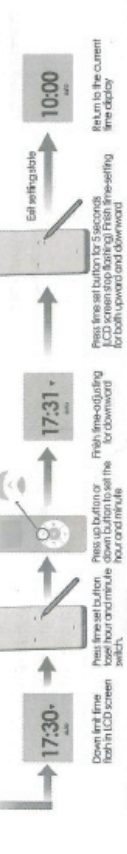

#### Additional Function

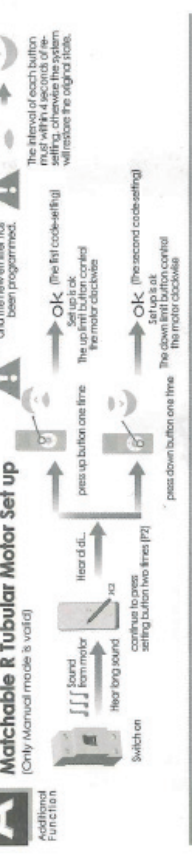

#### Additional Function

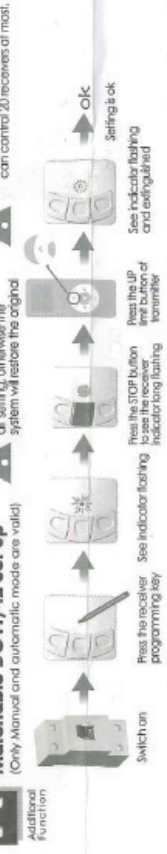

#### Additional Function

